



# SENSE-WARE

THE FLAME DETECTOR  
COMPANY



## Model UV-185/5

### UV Flame Detector

- UV Sensor
- Corrosion proof  
GRP housing
- Non-Incendive for Zone 2
- Weather Resistant
- Relay & 4-20 mA Outputs
- Automatic & Manual  
Self Test
- 5 Year Warranty
- ATEX, IECEx &  
FM3611 Approved
- EN54-10 & FM3260  
Approved
- Suitable for Zone 2 &  
Safe Areas
- Low Power

The Sense-WARE UV Flame Detector is designed to give optimum performance for Zone 2 and Safe Area indoor flame detection. Designed to detect all types of hydrocarbon fires and Hydrogen fires and immune to false alarms, the Model UV-185/5 offers a cost effective solution for Zone 2 and Safe Area industrial and commercial applications.

The Retroreflective ring around the window allows for easy testing with a Sense-Ware Test Lamp. The Pressure Compensating Element (PCE), prevents water ingress damaging the electronics.

Sense-WARE Flame Detectors offer fast performance, with a 5 year warranty making them the Best in Class.



### Typical Applications

- Battery Storage Rooms • Clean Rooms • Cold Storages • Engine Test Cells • Fume Hoods • Gas Cabinets • Gasoline / Gas Engine Rooms • Heating Rooms for Chemicals • Indoor Chemical Storage • Indoor Chemical, Fuel & Solvent Storage • Indoor Hydrocarbon Storage and Processing • Indoor Hydrogen Storage and Processing • Radio Amplifier Rooms / Isolators for Antennas • Laboratories • Monitoring of Machinery

## Specifications

**Spectral Range**  
185 - 260 nm

**Maximum Range**  
23 Meters (75 ft)  
0.09 m<sup>2</sup> (1 Sq.Ft.) Heptane pan fire

**Typical Response**  
<10 Seconds

**Field of View**  
90° x 90°

**Input Power**  
10-28 VDC

**Current (Normal)**  
25 mA @ 24 VDC  
(75 mA peak during Self-Test)

**Current (Alarm)**  
± 35 mA @ 24 VDC

**Start Up Time**  
<10 Seconds

**Analogue Signal - Sink**  
0-20 mA

**Power Fault**  
0 mA

**Optical Fault**  
2 mA

**Normal Operation**  
4 mA

**Alarm**  
20 mA

**Relays**  
Alarm & Fault SPDT


**Relay Contact Rating**  
30 VDC / 2 A / 60 W

**Latching (default) / Non Latching**  
DIL Switch selectable

**Normal Operation**  
Green LED

**Alarm Indication**  
Red LED

**Fault Indication**  
Yellow LED

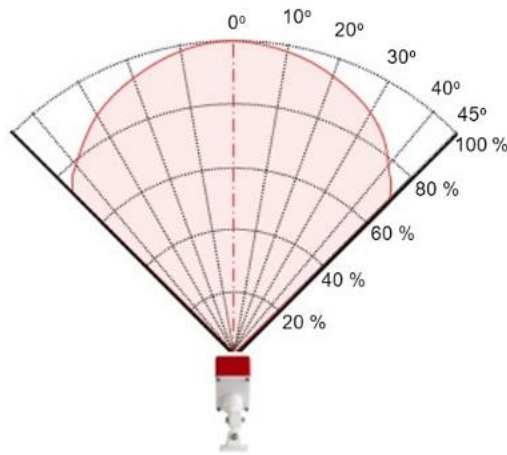

**Automatic Self-Test**  
Once per Hour

**Manual Self-Test**  
Available (see Manual)

**Cable gland (pre-mounted)**  
1 x M20

**Cable diameter**  
5.5-13 mm / 20-60 AWG

**Housing**  
GRP

**Temperature Range**  
-25 °C to +70 °C Hazardous Area  
-40 °C to +70 °C Safe Area

**Humidity**  
0-95 % Non Condensing

**Ingress Protection**  
IP65

**Pressure Compensation**  
PCE

**Weight**  
465 g

**Dimensions**  
125 x 80 x 57 mm

**Warranty**  
5 Years



## Model UV-185/5

### Approvals

**EN54-10**  
Performance, Class 2

**ATEX, IEC Hazardous Area**  
II 3G Ex nA IIC T4 Gc,  
II 3D EX tc IIIC T71°C Dc

**FM3260**  
Performance (see Manual)

**FM3611 Hazardous Area**  
Non-Incendive: Class I, II, III,  
Div 2, Groups A,B,C,D,F,G  
(see Manual)

### Accessories

**I.S. Test Lamp**  
TC-940/1Z

**Non EX Test Lamp**  
TC-169/1

**Swivel Mount**  
SM21

Specifications may be subject to change

[www.sense-ware.com](http://www.sense-ware.com)

### EUROPE, M. EAST & AFRICA

SENSE-WARE  
Fire and Gas Detection B.V  
Fokkerstraat 25  
3905 KV Veenendaal  
The Netherlands, EU  
Phone: +31 88 736 7300  
Email: [eu@sense-ware.com](mailto:eu@sense-ware.com)

### NORTH & SOUTH AMERICA

SENSE-WARE Americas  
1942 W White Oak Dr.  
Peoria IL 61614  
Illinois  
USA  
Phone: +1 888 732 7521  
Email: [americas@sense-ware.com](mailto:americas@sense-ware.com)

### ASIA & OCEANIA

SENSE-WARE Asia Pacific  
59 Fen Ji Hu, Danshui  
New Taipei City 25163  
Taiwan  
Mobile: +886 926 664 232  
Phone: +886 2 862 628 93  
Email: [ap@sense-ware.com](mailto:ap@sense-ware.com)